

# SUBMITTAL DATA SHEET


X-POT-6 MODEL# 58761

EFFECTIVE DATE: JANUARY, 2017

Job Name		Contractor	
Job Location		Approval	
Engineer		Contractor P.O. No.	
Approval		Representative	

## SKIDMORE® X-POT6® SPECIFICATION

- All stainless steel construction including all 1" valves and 1" fittings
- AAV (automatic air vent) = Brass
- Dosing Capacity - 2.6gal
- Factory Test Pressure – 225 PSI
- Max Working Pressure - 150 PSI
- Flow Rate up to 15.8gal/m (clean filters)
- Max System Volume: 22,824 Gallons
- Temp Range: 32 to 200 °F
- Weight - Empty = 60lbs, Full = 82lbs, Shipping = 120 lbs
- 1 SS magnet grate containing 6 rare earth magnets
- 1 SS baffle plate
- Compatible with 100, 50, 20, 5 & 0.5µ cartridge filters
- Wall mounted

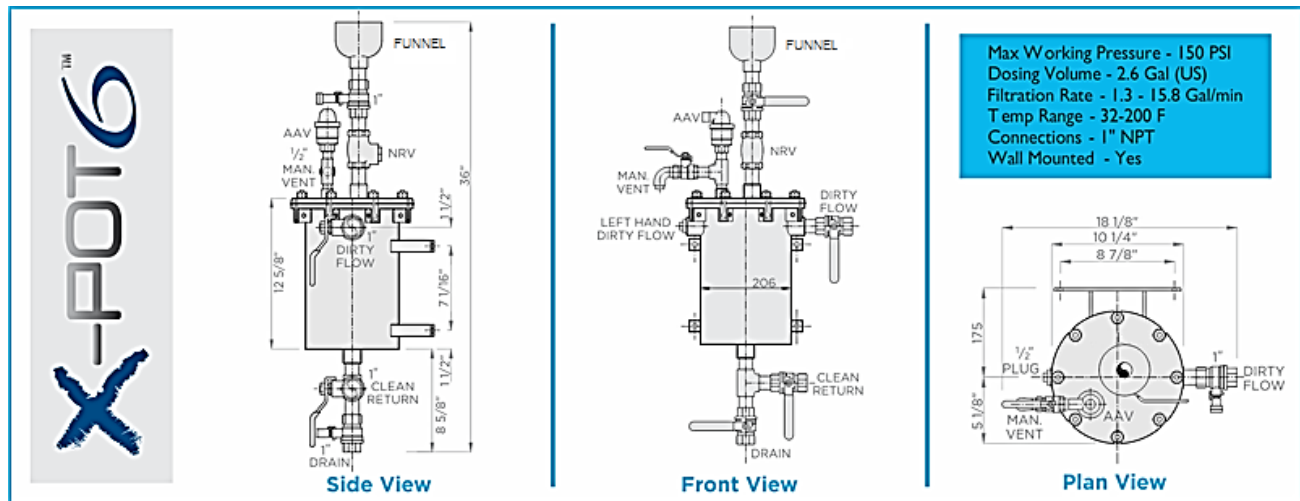

1875 DEWEY AVE BENTON HARBOR, MICHIGAN 49022  
WWW.SKIDMOREPUMP.COM