SUBMITTAL DATA SHEET


X-POT-COMPACT MODEL# 58760

EFFECTIVE DATE: JANUARY, 2017

Job Name	Contractor	
Job Location	Approval	
Engineer	Contractor P.O. No.	
Approval	Representative	

X-POT COMPACT® SPECIFICATION

- All stainless steel construction including all ¹/₂" Valves and ¹/₂" fittings
- AAV (automatic air vent) = BRASS
- o Dosing Capacity: 1.18 gal
- Factory Test Pressure: 225 PSI
- Max Working Pressure: 150 PSI
- Flow Rate: Up to 6.3 Gal/m (clean filters)
- Max System Volume: 9,130 Gallons
- o Temp Range: 32 to 200 F
- Weight: Empty = 35lbs, Full = 45lbs, Shipping = 50lbs
- o 1SS magnet grate containing 4 rare earth magnets
- o 1SS baffle plate
- o Compatible with 100, 50, 20, 5 & 0.5µ cartridge filters
- Wall Mounted

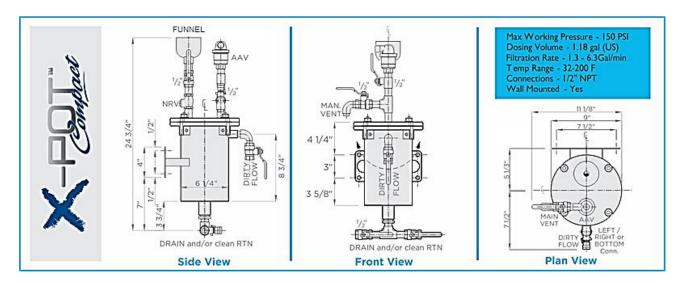



1875 DEWEY AVE BENTON HARBOR, MICHIGAN 49022 WWW.SKIDMOREPUMP.COM